

OS Q2

The new dimension of scanning



 **ZEUTSCHEL**
Cultural Heritage is our Passion

OS Q2

The new dimension of scanning

The OS Q Scanner Generation is the result of new technological developments as well as our consistent work on technical innovations. It fulfills the highest demands under the headings of image quality, process efficiency and productivity.

The unique image quality of the OS Q is based on the perfect interplay of especially high-quality technical components. Thus, the image quality of the OS Q extends far beyond the requirements of all common digitalization standards, e.g. ISO 19264-1, Metamorfoze or FADGI.

The scanning system features a completely new and self-developed camera system based on a CMOS sensor. The camera features a high

dynamic range and is also capable of reproducing the finest gradations. The result: sharp, low-noise, high-contrast images which reflect even the finest details true to the original.


A special guided lighting of the LED lighting system with a constant angle enables the OS Q to reproduce even difficult originals free from reflection or shadowing. Reflections on shining surfaces or shadows in the book fold are optically corrected.

A CRI value of over 97 combined with optimally matched camera and lighting components enable excellent color rendering.

The OS Q sets the reference mark for high scanning productivity.


The OS Q Scanner series achieves the highest efficiency in the scanning process through the perfect interplay with tried and tested Zeutschel imaging systems. Functions such as self-opening glass panes, sliding self-balancing book supporting plates and a scanning automatic system ensure the highest productivity levels.

The OS Q Overhead Scanner is designed as a flexible modular system. If the requirements and tasks increase, it can be expanded in a modular way.



Compliant to

ISO 19264-1 Level A
FADGI 4 Star
Metamorfoze Full

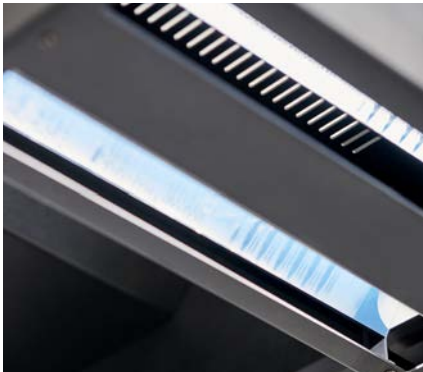

LED lighting system for reflection-free and shadow-free results



Camera system based on a CMOS sensor



Fulfills ISO 19264-1 Level A, Metamorfoze Full and FADGI 4 Star



High depth of focus - electronically adjustable aperture



Perfect interplay between high-quality technical components



Various book holders optionally available

Product advantages

- RGB line sensor (3-channel, CMOS technology)
- Resolution of up to 600 ppi
- Fulfills ISO 19264-1 Level A, Metamorfoze Full and FADGI 4 Star
- Internal image processing with 96 bit
- Data output in 48 bit/24 bit color, 16 bit/8 bit grayscale and 1 bit b/w
- True RGB capture on each pixel (no color interpolation)
- Color rendering index (CRI) of LED lighting >97
- True parallel scanning
- Camera Link interface for fastest image transfer
- Variable exposure times and aperture settings
- OmniScan software with 48 bit data output
- Line focused illumination for glare-free operation
- Fastest scanning speed
- Perfect Book – 3D scan technology for perfect book fold correction
- Parallel scanning and saving process based on 64 bit technology and multi-threading
- Bi-directional scanning
- High productivity based on ROI scan function (limitation of the area to be scanned)
- Color rendering corresponds to the original
- No UV/IR radiation
- No reflections with high-shine originals
- Ergonomic work method for the highest quality demands – with or without glass plate

| | |
|--|---|
| Camera sensor | RGB line sensor (3-channel, CMOS technology) |
| Resolution | MeanMTF10 at 600 ppi: 12 lp/mm |
| Camera system | wear-free mechanical shutter, variable exposure time, electronically adjustable aperture; automatic white and black balance, variable depth of focus |
| Max. original size | > DIN A2 |
| A2+ size Advanced Plus book cradle | 635 mm × 460 mm / 25" × 18" |
| Max. book thickness under glass plate | 150 mm / 5.9" |
| Scan mode | 96 bit color |
| Scanning speed (from start to end of scanning process) in A2 | approx. 3 sec @ 400 ppi approx. 5 sec @ 600 ppi |
| Scanner interface | Camera Link |
| Electrical data / safety | |
| Voltage | 110–240 V |
| Frequency | 50–60 Hz |
| Max. consumption | 440 W |
| Safety inspections / authorizations | - Authorization in accordance with the IEC agreement (international authorization for the safety of IT products – includes EMC, electrical safety, device safety for CE, UL, ETL, CSA) - LEDs tested in accordance with: IEC 62471:2006 "Photobiological safety of lamps and lamp systems" |
| Dimensions | |
| Width | 1046 mm / 41.18" |
| Depth | 1700 mm / 66.93" |
| Height | 1625 mm / 63.98" |
| Footprint (depth × width) | 1116 mm × 1046 mm / 43.93" × 41.18" |
| Recommended working conditions | - Temperature range: 18–35°C - Relative air humidity, non-condensing: 80 % |
| Operating system | |
| Operating system | Windows 10 (64 bit) |
| Scanning software | min. OmniScan 12.12 64 bit |


Technical changes reserved



Zeutschel GmbH | Heerweg 2 | 72070 Tübingen | Germany

T +49 7071 9706-0 | F +49 7071 9706-44 | info@zeutschel.de | www.zeutschel.com

More information:



www.zeutschel.de/en/produkte/scanner/farb-scanner/OS_Q2.html